

High temperature and fluid resistant, extra tough, semi-rigid heat-shrinkable tubing. Excellent chemical resistance, excellent abrasion resistance, 2:1 shrink ratio.

RW-175 is an extremely tough, high temperature, thin wall insulation tubing. This transparent, non-burning, semi-rigid tubing has superior resistance to most industrial fuels, solvents and chemicals.


Designed for applications requiring strain relief at temperatures up to 175°C, this product is unusually tough in its resistance to abrasion and cut through. Typical applications include high temperature

applications, protection, strain relief, chemical resistance, mechanical and abrasion protection.

Temperature rating

Operating temperature range:	-55°C to +175°C
Minimum shrink temperature:	+155°C
Minimum full recovery temperature:	+175°C

Ordering information

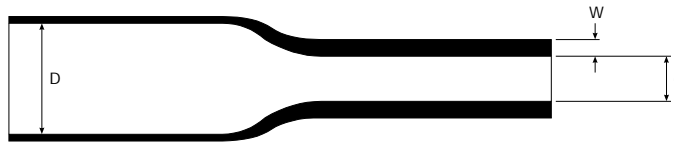

Inside diameter		Wall thickness	Standard package	
D (min)	d (max)	W (nom)	1.22m	
Expanded as supplied	Recovered after heating	Recovered after heating	Length quantity	Ordering description
mm	mm	mm	m	
1.2	0.6	0.25	60	RW-175- ³ / ₆₄ -X
1.6	0.8	0.25	60	RW-175- ¹ / ₁₆ -X
2.4	1.2	0.27	60	RW-175- ³ / ₃₂ -X
3.2	1.6	0.27	60	RW-175- ¹ / ₈ -X
4.8	2.4	0.27	60	RW-175- ³ / ₁₆ -X
6.4	3.2	0.33	30	RW-175- ¹ / ₄ -X
9.5	4.8	0.33	30	RW-175- ³ / ₈ -X
12.7	6.4	0.33	30	RW-175- ¹ / ₂ -X
19.0	9.5	0.43	30	RW-175- ³ / ₄ -X
25.4	12.7	0.48	30	RW-175-1-X
38.1	19.1	0.51	12	RW-175-1 ¹ / ₂ -X
50.8	25.4	0.51	6	RW-175-2-X

Standard colors

Standard color	Clear
Code	X
Non-Standard color	Black
Code	O

Approvals

UL 224 E35586 VW-1	Def Stan 59-97 Type 3
CSA LR31929	SAE AMS-DTL-23053/8
VG 95343 Part 5 Type F	VDE 0341/Pt 9005
BS 3G 198 Part 4	

Performance

Test	Test method	Test requirement
Heat Ageing:	IEC 60684 - 2 clause 39 (168h at 200°C)	Tensile strength: 15 MPa (min) Elongation: 75% (min)
Corrosion resistance:	IEC 60684 - 2 clause 33 (16h at 175°C)	No corrosion of mirrors
Breakdown voltage:	IEC 60684 - 2 clause 21	See table in spec
Flame propagation:	IEC 60684 - 2 clause 26 Method C	15s (max) UL 224 VW1
Fluid resistance:	IEC 60684 - 2 clause 36	Tensile strength: 25 MPa (min) Ultimate elongation: 150% (min)
	Test fluids:	Aircraft fuel to ISO1817 liquid F (70°C) Phosphate ester ISO1817 liquid 103 (23°C) Lubricating oil ISO1817 liquid 101 (70°C)

For full product performance details consult Raychem Specification RW-3029/1.

Specifications

Raychem Specification RW-3029/1.

Material Safety Data Sheet available on request.

Installation instructions available on request.

Raychem and RW-175 are trademarks of Tyco Electronics Corporation.

Users should independently evaluate the suitability of the product for their application.

Tyco Electronics Corporation
300 Constitution Drive
Menlo Park, CA 94025-1164
USA
Tel: (800) 926-2425 (US & Canada)
Tel: +1 (650) 361-3860 (All other countries)

Tyco Electronics UK Ltd.
Faraday Road
Dorcan, Swindon, SN3 5HH
United Kingdom
Tel: +44 1793 528171

Tyco Electronics Raychem K.K.
3816 Noborito, Tama-ku
Kawasaki, Kanagawa 214-8533
Japan
Tel: +81 44 900 5102

Tyco Electronics Singapore Pte Ltd.
Asia Pacific Headquarters
26 Ang Mo Kio, Industrial Park 2
Singapore 569507
Tel: +65 4866 151

All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application. Tyco Electronics Corporation makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Electronics Corporation's only obligations are those in the Standard Terms and Conditions of Sale for these products and in no case will Tyco Electronics Corporation be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Tyco Electronics Corporation's Specifications are subject to change without notice. In addition, Tyco Electronics Corporation reserves the right to make changes in materials or processing without notification to the Buyer which do not affect compliance with any applicable specification.

For more information about this product visit www.tycoelectronics.com and www.raychem.com